



FEATURES


- SC-Cut Crystal
- High precision
- Low aging
- Low phase noise



Parameters	Specifications		
	560	570	580
Frequency Range 頻率範圍	5.0MHz ~ 20.0MHz		
Standard Frequency	5.0MHz	5.0MHz	10.0MHz
	8.192MHz	16.384MHz	13.0MHz
	10.0MHz		16.384MHz
	13.0MHz		-
Long Term Stability Per Year	$\pm 5 \times 10^{-8}$ Max	$\pm 5 \times 10^{-8}$ Max	$\pm 5 \times 10^{-8}$ Max
Long Term stability Per Day	$\pm 5 \times 10^{-10}$ Max	$\pm 5 \times 10^{-10}$ Max	$\pm 5 \times 10^{-10}$ Max
Short Term Stability Allan Var. for Tau = 1 sec	$\pm 5 \times 10^{-12}$ Max	$\pm 5 \times 10^{-12}$ Max	$\pm 5 \times 10^{-12}$ Max
Frequency Stability 頻率偏差			
vs. Operating Temp. 相對工作溫度	$\pm 5 \times 10^{-8}$ Max	$\pm 5 \times 10^{-9}$ Max	$\pm 5 \times 10^{-9}$ Max
vs. Load Variation $\pm 10\%$ (50 Ω Load)	$\pm 3 \times 10^{-10}$ Max	$\pm 3 \times 10^{-10}$ Max	$\pm 3 \times 10^{-10}$ Max
vs. Supply Voltage Variation $\pm 10\%$	$\pm 3 \times 10^{-10}$ Max	$\pm 3 \times 10^{-10}$ Max	$\pm 3 \times 10^{-10}$ Max
Operating Temperature Range 工作溫度範圍	-10°C to +70°C	-10°C to +70°C	-10°C to +70°C
Storage Temperature Range 儲存溫度範圍	-55°C to +85°C	-55°C to +85°C	-55°C to +85°C
Frequency Adjustment	$\pm 3 \times 10^{-7}$ Max	$\pm 3 \times 10^{-7}$ Max	$\pm 3 \times 10^{-7}$ Max
Supply Voltage 工作電壓	12Vdc $\pm 10\%$	12Vdc $\pm 10\%$	5Vdc $\pm 10\%$
Current Consumption at 25°C	120mA Max.	120mA Max.	300mA Max.
Current Consumption at Warm Up	500mA Max.	500mA Max.	800mA Max.
Output Signal	Sine	Sine	HCMOS
Level	225mV Min.	225mV Min.	10K Ω / 15pf
Warm Up Time (Within 5×10^{-8})	5 Min Max.	5 Min Max.	5 Min Max.
Warm Up Time (Within 2×10^{-8})	8 Min Min.	8 Min Min.	8 Min Min.
Phase Noise	10Hz	-125dBc/Hz	-122dBc/Hz
	10KHz	-155dBc/Hz	-152dBc/Hz
Shock	175g		
Vibration	1-500Hz, 10g		
Humidity	98% at +35°C		

Please consult our sales representatives for other specifications.
如對其他規格查詢，請與我司銷售人員聯繫

DIMENSION (mm)

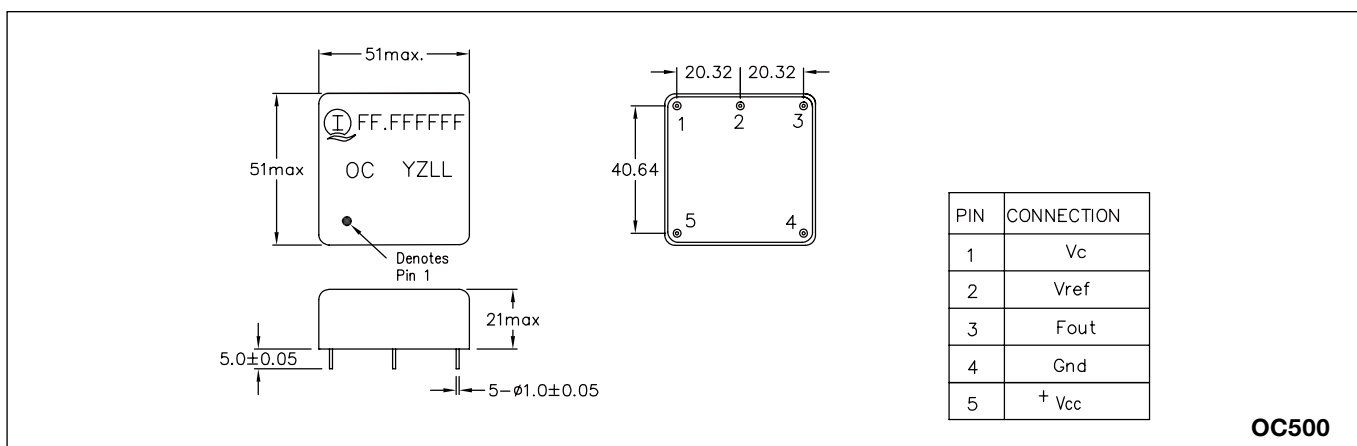

All specifications are subject to change without prior notice.
本公司保留修改規格的權利。

